Pharmacy Information System (PhIS)

PhIS
IP Setup on Lexmark Laserjet
Printer Manual

Version	**: 1.0**
Document ID	**: PhIS/IP_Setup_on_Lexmark_Laserjet_Printer_Manual_v1.0**

Contents

Revision History iv

Guideline setup IP Address for Lexmark Laser Jet Printer 5

Prerequisite: 5

Purpose: 5

© 2011-2024 Pharmaniaga Logistics Sdn Bhd (PLSB)

CONFIDENTIAL COPYRIGHTED MATERIAL – *The information includes all concepts, comments, recommendations, and material, contained herein shall remain the property of Pharmaniaga Logistics Sdn Bhd (PLSB). No portion of this document shall be disclosed, duplicated or used in whole or in part of any purpose other than the purpose of the Pharmacy Information System (PhIS) Project execution only.*

Revision History

Version No.	Date of Release	Consolidated by	Verified by	List of changes from Previous Version
1.0	10/5/2024	Mohd Ridhwan Jamaluddin Arif Syahrir Mohd Isah	Sophian Ezudean Mustapha	Initial document

Verified and Acknowledge by

Name	Role / Designation	Organization	Signature & Date
Sophian Ezudean	Manager	Pharmaniaga Logistic S/B	
		Program Perkhidmatan Farmasi (PPF), KKM	
		Bahagian Pengurusan Maklumat (BPM), KKM	

Peer Review

Version No.	Reviewed / Verified by	List of changes from Previous Version
1.0	(QA) Juridah	- Overall review

Guideline setup IP Address for Lexmark Laserjet Printer

Prerequisite:

1. Lexmark Laser Jet Printer

Purpose:

To configure IP address setup at Lexmark Laser Jet Printer

NO	PICTURE	DESCRIPTION
1	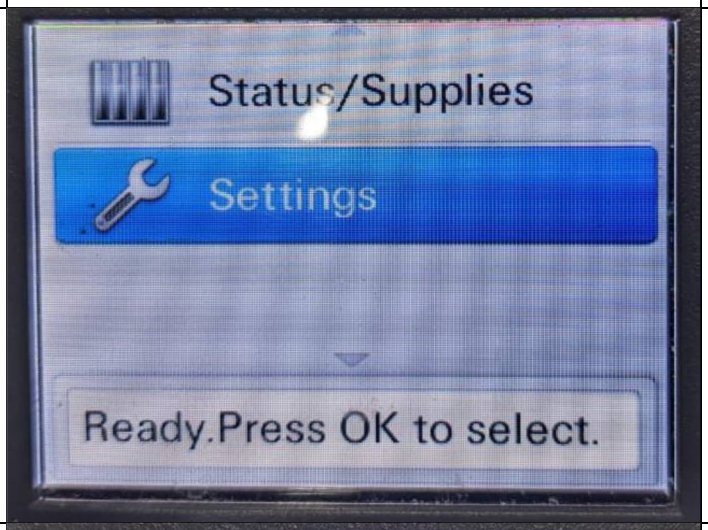	Firstly, choose Setting and press OK button.
2	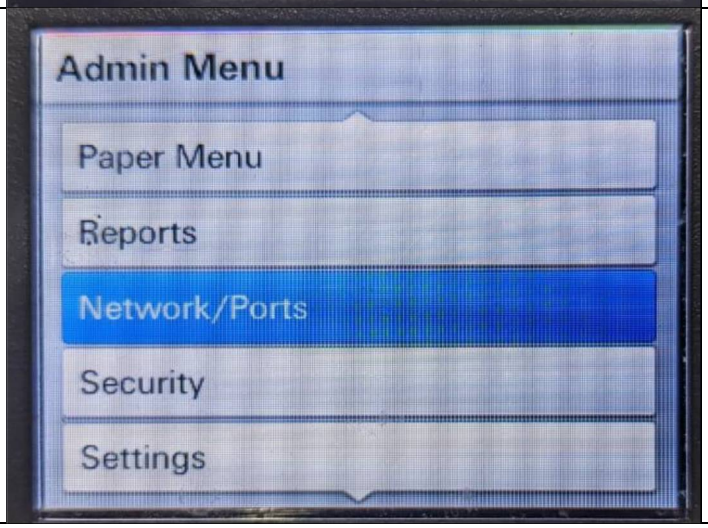	Then, scroll down on Admin menu and click OK to Network/Ports.

3	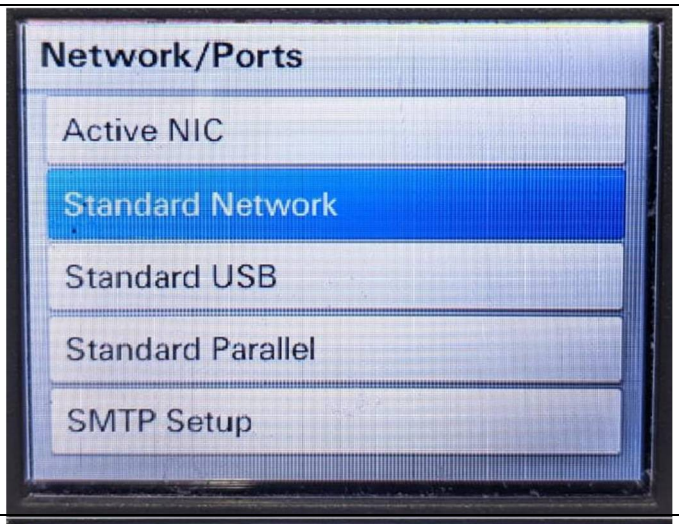	Choose Standard Network
4	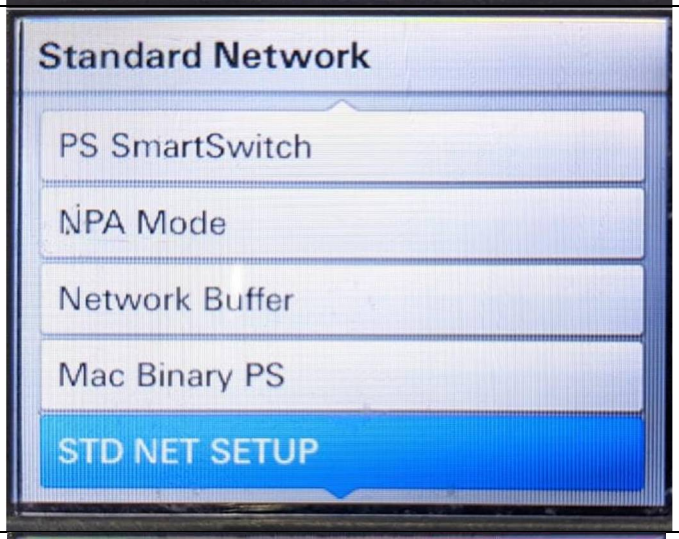	After that, Click to STD NET SETUP on Standard Network menu.
5	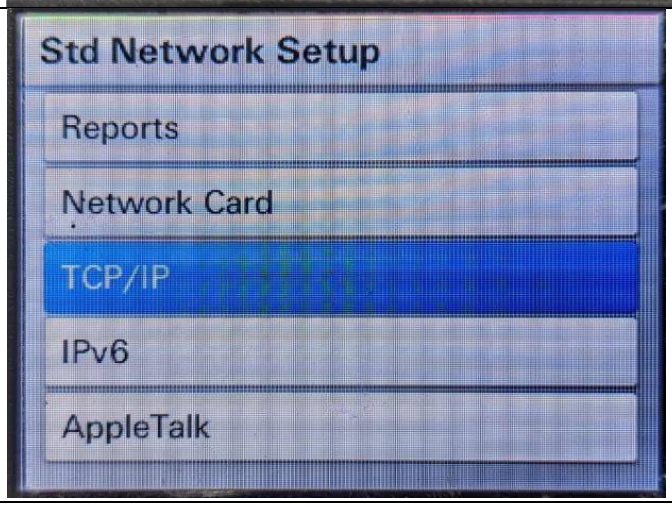	Choose TCP/IP

6	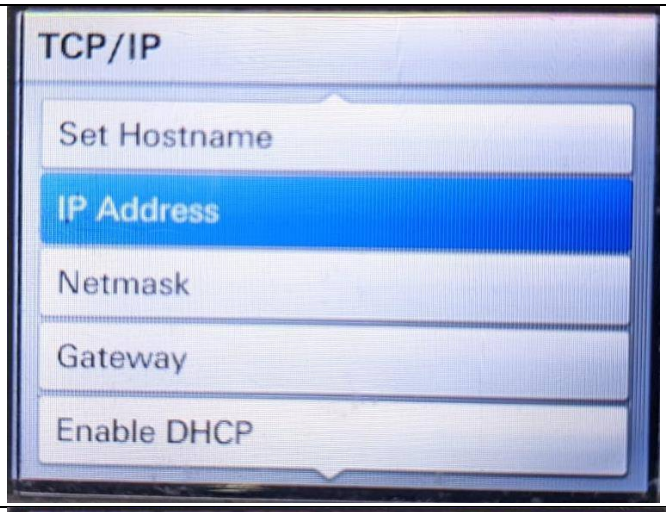	On TCP/IP menu, click at IP Address.
7	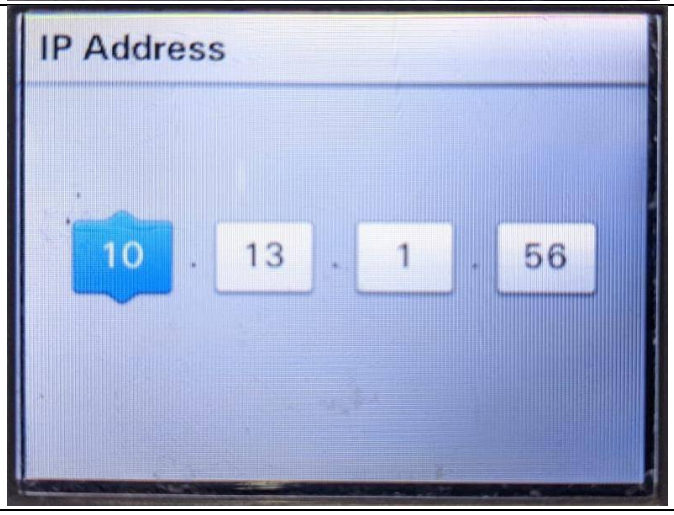	After entering menu as shown in the picture, change IP Address as provided by IT Department for the specific hardware. To change next number, click arrow button left or right then follow the same step. Click button **OK** after change IP Address to save.
8		Subnet Mask and Gate away can follow the step as above.